


Habitable attic on rafters — System 10 Basic

Variant A · Multistrat, Gold and Wolle on the interior side · optional: Roof Pro or Roof Optim on the roof boarding, Bronze or Silver between counter-batten and batten · rafters 25 cm

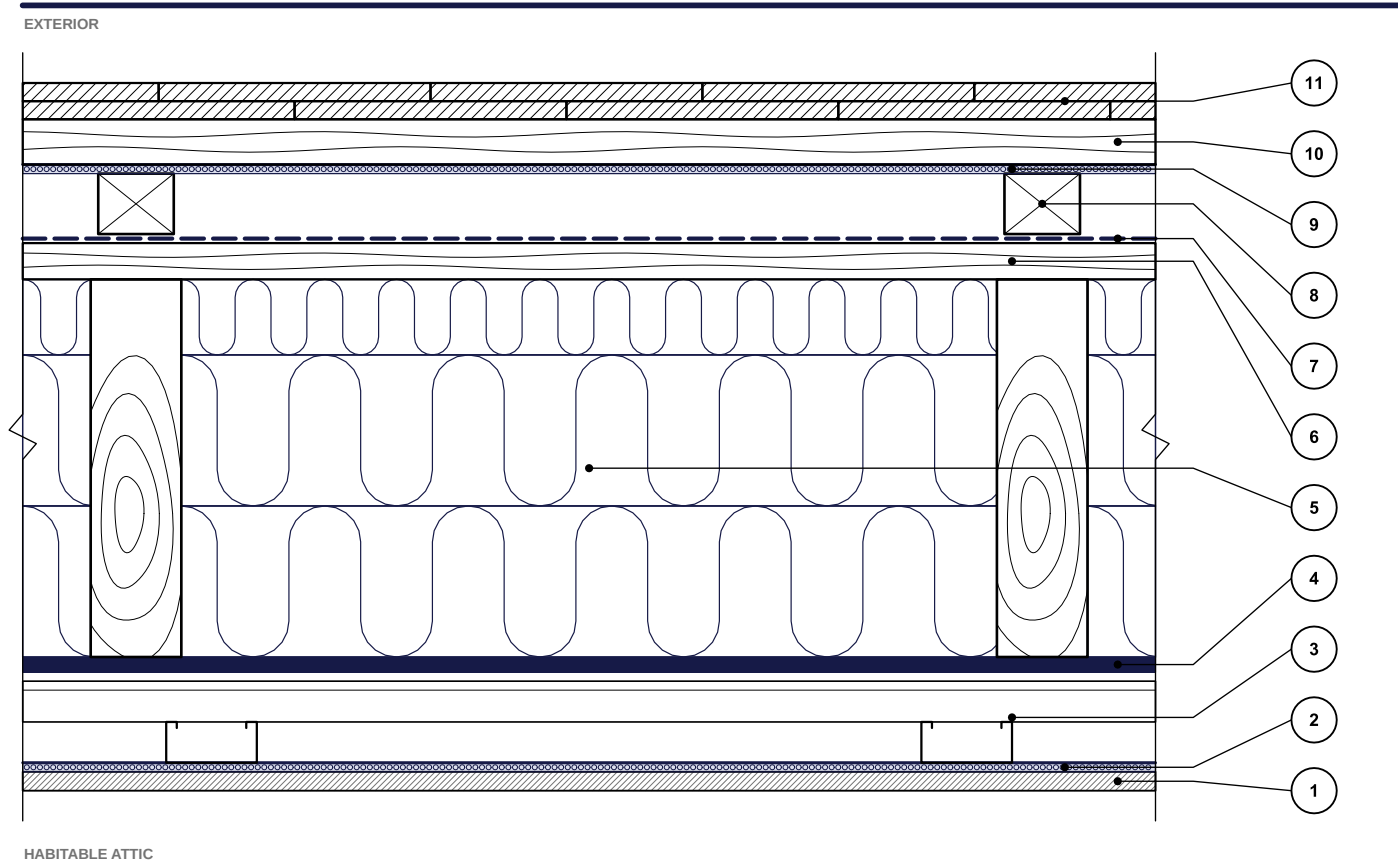

Build-up

- 1 Finish — plasterboard 12.5 mm
- 2 Phase II — Reflectiva Multistrat
- 3 Double framework of CD 60/27 profiles — 6 cm closed air layer
- 4 Phase I — Reflectiva Gold
- 5 Rafters 25 cm + Isoflect Wolle
- 6 Roof boarding 24 mm
- 7 Optional — Reflectiva Roof Pro or Roof Optim, over the roof boarding
- 8 Counter-battens 40 × 50 mm
- 9 Optional — Reflectiva Bronze (aluminium facing upwards) or Silver, between counter-batten and batten
- 10 Battens 30 × 50 mm
- 11 Ceramic scale-pattern roof tile

Note
Principle detail. It does not replace the execution design; thicknesses and fixings are determined by calculation for each project.

Mandatory for Bronze / Silver between batten and counter-batten: a minimum of 50 cm is left open at the bottom, at the eaves, and a minimum of 50 cm at the top, at the ridge, so that air can circulate and remove the condensation coming from the interior.



www.isoflect.com

Designation	Code
Habitable attic System 10 A25	ISO-MAN-A25
Application	Scale
Habitable attics — between rafters	1:5
Isoflect products	Edition
Gold · Multistrat · Wolle · Roof Pro/Optim · Bronze/Silver	10.2026